

## Classical style 30-55W led garden and pedestrian road light

- Item Type: Garden Lights
- LED Light Source: CREE
- Input Voltage(V): 120-277V
- Lamp Power(W): 30w-55w
- Lamp Luminous Flux(lm): 3050-5890lm
- Lamp Luminous Efficiency(lm/w): >100lm/w
- CRI (Ra>): 70
- Color Temperature(CCT): 3000K-6500K
- Beam Angle(°):160x60
- Working Temperature(°C):-40 - +55 °C
- Working Lifetime(Hour):>50000hrs
- Lamp Body Material: Aluminum
- IP Rating: IP65
- Certification: CE, EMC, LVD
- Application:Garden Square Park Area
- Power Factor: 0.95
- Reference Color: RAL 9005 / RAL 7015
- Warranty: 5 Years
- Insulation class: Class I
- Driver: Mean well / Inventronics Dimmable 1/10
- Install the pipediameter:76mm



## Details of our LED Garden light

Whole body die cast aluminum housing

Double photomnum diffuser technology

Supper white toughened glass

Individual and sealed module

## Specifications of our LED Garden light


Insulation class	Power supply	LED current	Power Factor	Working Ambient	Life span	CRI	CCT
Class I	120-277V 50/60HZ	700mA	>0.95	-40 °C to +55 °C	>50,000hrs	RA>75	3000K-6500K

LED Qty	15pcs	20pcs	25pcs
Rated Power	30w	45w	55w
Luminous Flux	3050-3240lm	4550-4750lm	5550-5890lm
G.W/N.W	9/8kgs	9/8kgs	9/8kgs
Packing Size	410x410x875mm	410x410x875mm	410x410x875mm

## Product Photos





### PRODUCT DIMENSIONS(MM)


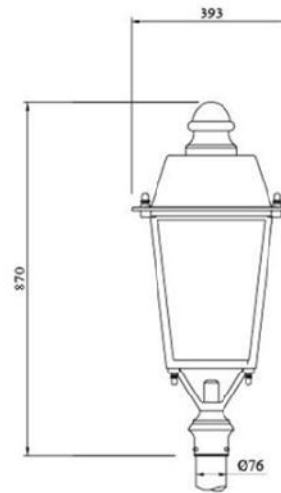


Polar Diagram



Type1

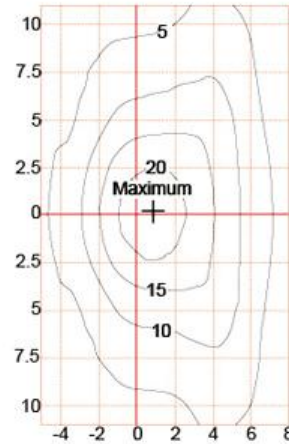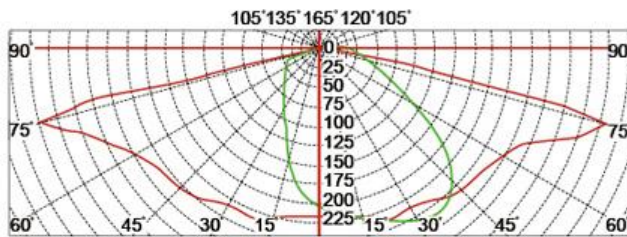

Type2

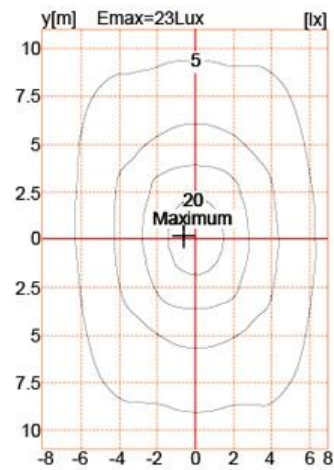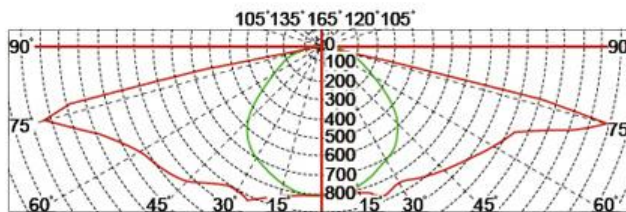

Type3

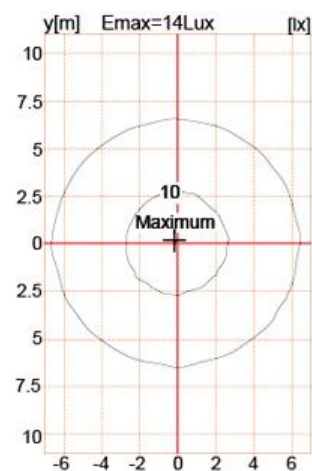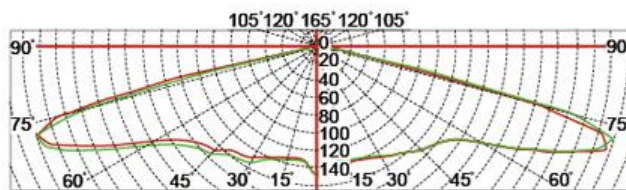

## Outdoor landscape led garden and pedestrian road spot light 30-60W IP65

- Item Type: Garden Lights
- LED Light Source: CREE
- Input Voltage(V): 120-277V
- Lamp Power(W): 30-60w
- Lamp Luminous Efficiency(lm/w): >100lm/w
- CRI (Ra>): 70
- Color Temperature(CCT): 3000K-6500K
- Beam Angle(°):160x60
- Working Temperature(°C):-40 - +55°C
- Working Lifetime(Hour):>50000hrs
- Lamp Body Material: Aluminum
- IP Rating: IP66
- Certification: CE, EMC, LVD
- Application:Garden Square Park Area
- Power Factor: 0.95
- Reference Color: RAL 9005 / RAL 7015
- Warranty: 5 Years
- Insulation class: Class I
- Driver: Mean well / Dimmable 1/10
- Install the pipediameter:76mm



### Details of our LED Garden light

**Die cast aluminum housing,aluminum sheet rotating cover**

**Double photometric diffuser technology**

**UV-stop PC lamp cover**

**Sealed lamp housing**

## Specifications of our LED Garden light



Insulation class	Power supply	LED current	Power Factor	Working Ambient	Life span	CRI	CCT
Class I	120-277V 50/60HZ	700mA	>0.95	-40 °C to +55 °C	>50,000hrs	RA>75	3000K-6500K

LED Qty	16pcs	24pcs	28pcs
Rated Power	30w	55w	60w
Luminous Flux	3010-3280lm	5540-5700lm	6070-6350lm
G.W/N.W	12.5/11kgs	12.5/11kgs	12.5/11kgs
Packing Size	570x570x570mm	570x570x570mm	570x570x570mm


## Product Photos



## Polar Diagram

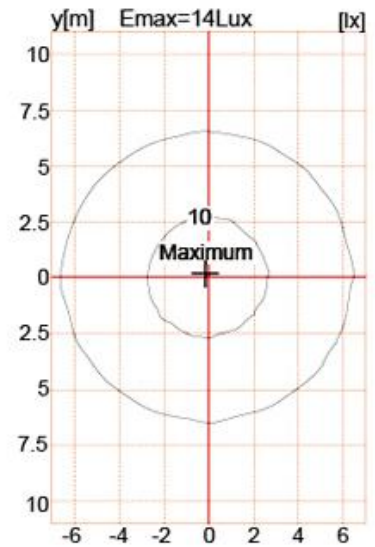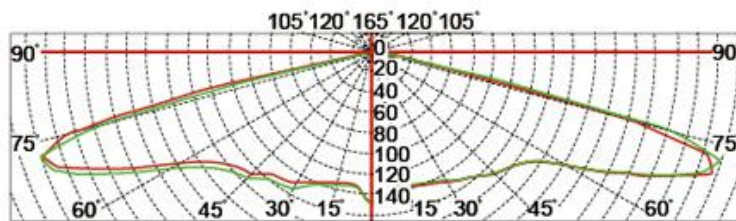

## PRODUCT DIMENSIONS(MM)

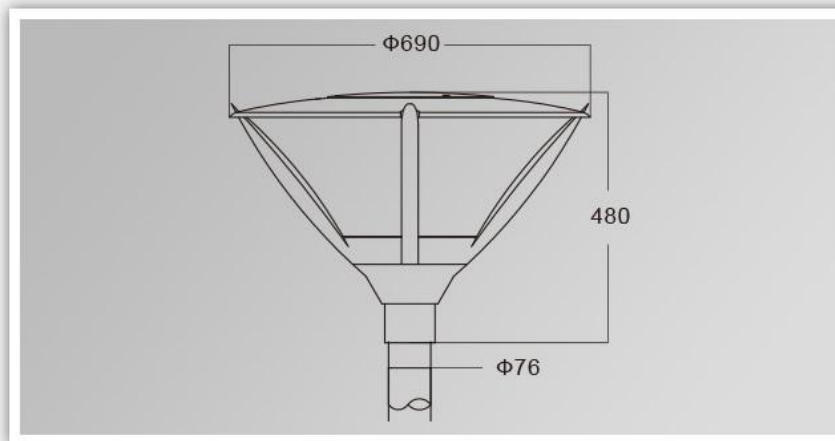

## Aluminum die casting 30-55W IP66 outdoor led garden light

- Item Type: Garden Lights
- LED Light Source: CREE
- Input Voltage(V): 120-277V
- Lamp Power(W): 30w-55w
- Lamp Luminous Efficiency(lm/w): >100lm/w
- CRI (Ra>): 70
- Color Temperature(CCT): 3000K-6500K
- Beam Angle(°):160x60
- Working Temperature(°C):-40 - +55°C
- Working Lifetime(Hour):>50000hrs
- Lamp Body Material: Aluminum
- IP Rating: IP66
- Certification: CE, EMC, LVD
- Application:Garden Square Park Area
- Power Factor: 0.95
- Reference Color: RAL 9005 / RAL 7015
- Warranty: 5 Years
- Insulation class: Class I
- Driver: Mean well / Dimmable 1/10
- Install the pipediameter:76mm

### PRODUCT DETAILS



## Details of our LED Garden light



Die cast aluminum housing, aluminum sheet rotating cover

Double photometric diffuser technology

Supper white toughened glass

Sealed lamp housing

### PRODUCT DIMENSIONS(MM)

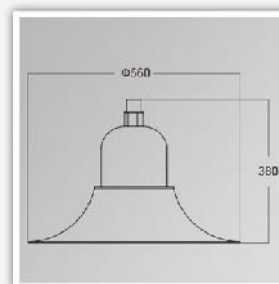


## Specifications of our LED Garden light

Insulation class	Power supply	LED current	Power Factor	Working Ambient	Life span	CRI	CCT
Class I	120-277V 50/60HZ	700mA	>0.95	-40 °C to +55 °C	>50,000hrs	RA>75	3000K-6500K

LED Qty	15pcs	20pcs	25pcs
Rated Power	30w	45w	55w
Luminous Flux	3050-3340lm	4550-4700lm	5540-5790lm
G.W/N.W	6.5/5.5kgs	6.5/5.5kgs	6.5/5.5kgs
Packing Size	460x460x460mm	460x460x460mm	460x460x460mm



## Product Photos

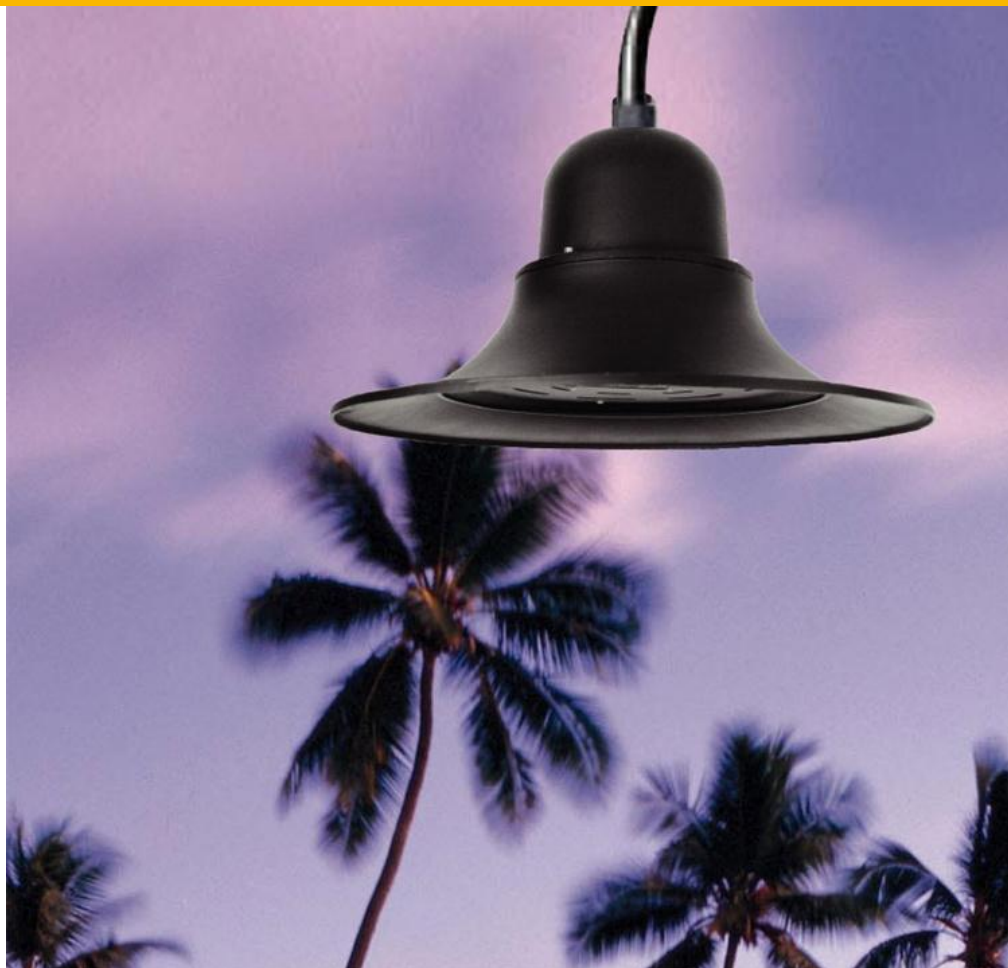





**Polar Diagram**

Type1

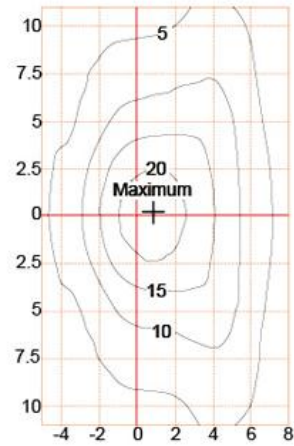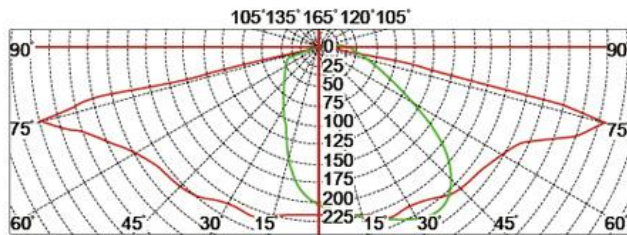

Type2

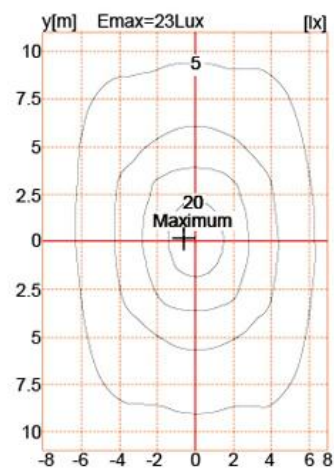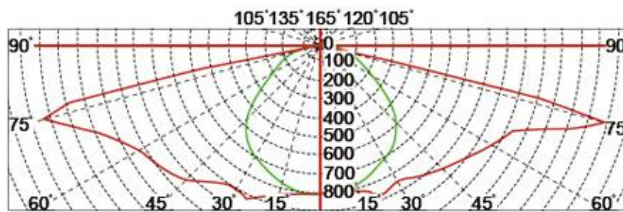

Type3

