

Solar LED STREET LIGHTS




SUMEC



GREENESCO Ομήρου 8, 10564 Αθήνα
Τ. 2103677744, 2111077744
info@greenesco.gr

www.greenesco.gr

SUMEC

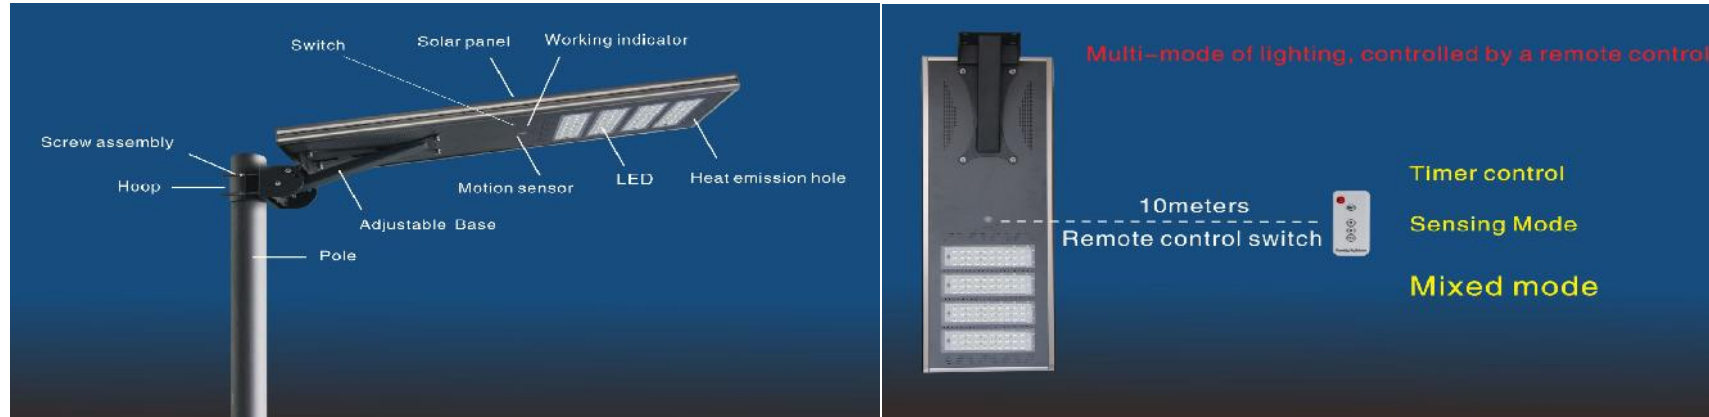




Angle adjustable

According to the actual installation needs to adjust the angle of the lamp, the base has three adjustment holes, fixed the corresponding screw hole, you can fix the corresponding angle

Adjustable angle range: 15° -45°



Using the advanced stoving varnish craft
Strongly anti-corrosion


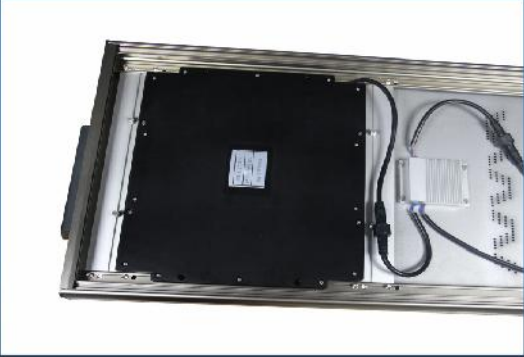


Independent battery box design

- Ip65 waterproof for all the light body
- Independent IP65 design for the battery box
- Raised the waterproofing grade
- Increased the using life of the product




Designed and studied by our Senior Expert, making higher conversion efficiency and more stable quality

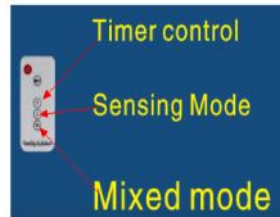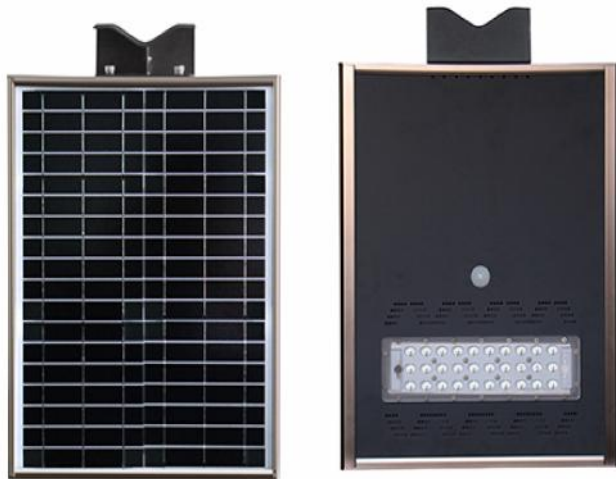

Solar street light		Model: CSL-20SM	
Main Lamps material	Aluminium Alloy		
Solar panel	Max Power	18V/25W	
Battery	Type	Lithium battery 12V 10AH	
LED	Led chip brand	Bridgelux from USA with high brightness	
	Lumen(LM)	2000 -2200LM equal to 20W	
	CCT (k)	6000-6500k	
	Life Time	50000 hours	
Lighting Viewing Angle	150°x70°		
Working TEMP(°C)	-20°~+60°		
Working Mode	1. Time Control Mode , 2.Sensing Mode , 3.Time Control + Sensing Mode (Switched by smart remote control)		
Charge time(by sun):	8-10hours (with enough strong shine)		
Discharge time	10-12 hours per night 5-7 rainy days		
Certificate	CE/ROHS/IP65		
Warranty period	2years		
Packing	Product size	536*355*70 mm	
	Packing size	600*415*135 mm	
	Net weight	5.5kg	
	Gross weight	6,5	
	Packing way	1pcs/ctns	
Packs Containers	20ft container	825pcs	
	40gp container	1650pcs	
Installation height	5-6 meters	Suggestion distance	25-30meters




Solar street light		Model: CSL-30SM	
Main Lamps material	Aluminium Alloy		
Solar panel	Max Power	18V/30W	
Battery	Type	Lithium battery 12V 15AH	
LED	Led chip brand	Philips	
	Lumen(LM)	3000-3300 LM equal to 30W	
	CCT (k)	6000-6500k	
	Life Time	50000 hours	
Lighting Viewing Angle	150°x70°		
Working TEMP(°C)	-20°~+60°		
Working Mode	1. Time Control Mode , 2.Sensing Mode , 3.Time Control + Sensing Mode (Switched by smart remote control)		
Charge time(by sun):	8-10hours (with enough strong shine)		
Discharge time	10-12 hours per night 5-7 rainy days		
Certificate	CE/ROHS/IP65		
Warranty period	2years		
Packing	Product size	605*355*70 mm	
	Packing size	660*415*135 mm	
	Net weight	6kg	
	Gross weight	7kg	
	Packing way	1pcs/ctns	
Packs Containers	20ft container	760pcs	
	40gp container	1520pcs	
Installation height	6-7 meters	Suggestion distance	25-30meters




Solar street light		Model: CSL-40SM	
Main Lamps material	Aluminium Alloy		
Solar panel	Max Power	18V/36W	
Battery	Type	Lithium battery 12V 20AH	
LED	Led chip brand	Philips	
	Lumen(LM)	4000-4400 LM equal to 40W	
	CCT (k)	6000-6500k	
	Life Time	50000 hours	
Lighting Viewing Angle	150°x70°		
Working TEMP(°C)	-20°~+60°		
Working Mode	1. Time Control Mode , 2.Sensing Mode , 3.Time Control + Sensing Mode (Switched by smart remote control)		
Charge time(by sun):	8-10hours (with enough strong shine)		
Discharge time	10-12 hours per night 5-7 rainy days		
Certificate	CE/ROHS/IP65		
Warranty period	2years		
Packing	Product size	700*355*144mm	
	Packing size	750*415*220 mm	
	Net weight	9.8kg	
	Gross weight	11kg	
	Packing way	1pcs/ctns	
Packs Containers	20ft container	415pcs	
	40gp container	830pcs	
Installation height	6-7meters	Suggestion distance	25-30meters




Solar street light		Model: CSL-50SM	
Main Lamps material	Aluminium Alloy		
Solar panel	Max Power	18V/40W	
Battery	Type	Lithium battery 12V 25AH	
LED	Led chip brand	Philips	
	Lumen(LM)	5000 -5500LM equal to 50W	
	CCT (k)	6000-6500k	
	Life Time	50000 hours	
Lighting Viewing Angle	150°x70°		
Working TEMP(°C)	-20°~+60°		
Working Mode	1. Time Control Mode , 2.Sensing Mode , 3.Time Control + Sensing Mode (Switched by smart remote control)		
Charge time(by sun):	8-10hours (with enough strong shine)		
Discharge time	10-12 hours per night 5-7 rainy days		
Certificate	CE/ROHS/IP65		
Warranty period	2years		
Packing	Product size	834*355*156 mm	
	Packing size	880*415*230 mm	
	Net weight	11kg	
	Gross weight	12kg	
	Packing way	1pcs/ctns	
Packs Containers	20ft container	335pcs	
	40gp container	670pcs	
Installation height	7-8meters	Suggestion distance	25-30meters



Solar street light		Model: CSL-60SM	
Main Lamps material	Aluminium Alloy		
Solar panel	Max Power	18V/45W	
Battery	Type	Lithium battery 12V 25AH	
LED	Led chip brand	Philips	
	Lumen(LM)	6000-6600LM equal to 60W	
	CCT (k)	6000-6500k	
	Life Time	50000 hours	
Lighting Viewing Angle	150°x70°		
Working TEMP(°C)	-20°~+60°		
Working Mode	1. Time Control Mode , 2.Sensing Mode , 3.Time Control Sensing Mode (Switched by smart remote control)		
Charge time(by sun):	8-10hours (with enough strong shine)		
Discharge time	10-12 hours per night 5-7 rainy days		
Certificate	CE/ROHS/IP65		
Warranty period	2years		
Packing	Product size	834*355*156 mm	
	Packing size	880*415*230 mm	
	Net weight	11.5kg	
	Gross weight	12.5kg	
	Packing way	1pcs/ctns	
Packs Containers	20ft container	335pcs	
	40gp container	670pcs	
Installation height	7-8meters	Suggestion distance	25-30meters



Solar street light		Model: CSL-70SM	
Main Lamps material	Aluminium Alloy		
Solar panel	Max Power	18V/55W	
Battery	Type	Lithium battery 15V 20AH	
LED	Led chip brand	Philips	
	Lumen(LM)	7000 -7700LM equal to 70W	
	CCT (k)	6000-6500k	
	Life Time	50000 hours	
Lighting Viewing Angle	150°x70°		
Working TEMP(°C)	-20°~+60°		
Working Mode	1. Time Control Mode , 2.Sensing Mode , 3.Time Control + Sensing Mode (Switched by smart remote control)		
Charge time(by sun):	8-10hours (with enough strong shine)		
Discharge time	10-12 hours per night 5-7 rainy days		
Certificate	CE/ROHS/IP65		
	2years		
Packing	Product size	1050*355*156 mm	
	Packing size	1100*415*230 mm	
	Net weight	12.5kg	
	Gross weight	15kg	
	Q'ty/ctn	1pcs/ctns	
Packs Containers	20ft container	28pcs	
	40gp container	560pcs	
Installation height	8-9 meters	Suggestion distance	25-30meters



Solar street light		Model: CSL-80SM	
Main Lamps material	Aluminium Alloy		
Solar panel	Max Power	18V/60W	
Battery	Type	Lithium battery 15V 25AH	
LED	Led chip brand	Philips	
	Lumen(LM)	8000 -8800LM equal to 80W	
	CCT (k)	6000-6500k	
	Life Time	50000 hours	
Lighting Viewing Angle	150°x70°		
Working TEMP(°C)	-20°~+60°		
Working Mode	1. Time Control Mode , 2.Sensing Mode , 3.Time Control + Sensing Mode (Switched by smart remote control)		
Charge time(by sun):	8-10hours (with enough strong shine)		
Discharge time	10-12 hours per night 5-7 rainy days		
Certificate	CE/ROHS/IP65		
	2years		
Packing	Product size	1050*355*156 mm	
	Packing size	1100*415*230 mm	
	Net weight	13kg	
	Gross weight	15.5kg	
	Q'ty/ctn	1pcs/ctns	
Packs Containers	20ft container	28pcs	
	40gp container	560pcs	
Installation height	8-9 meters	Suggestion distance	25-30meters